



IXG SYSTEM

FULL IP RESIDENTIAL SYSTEM

\\ IXG APP-ONLY SYSTEM

If you have an old, damaged or non-existent intercom system, you can turn your smartphone into an intercom with the IXG app. Up to 9,999 tenants can be on the app, each tenancy can use up to 8 apps with no intercom hardware required in the apartment.



Increased Security

The IXG System enhances security with an access control feature. The system achieves this through clear video identification, and secure and seamless unlocking via QR code authentication using the IXG mobile app.



Property Management

The IXG System streamlines property management with tools like resident notifications, the IXG app for multiple properties, and monitoring software to oversee system abnormalities.



Integration


Customize the system effortlessly to suit your requirements by seamlessly integrating IXG with the IX system, IP CCTV systems, IP PBX, plus a range of other third-party IP systems. This unparalleled flexibility renders it perfect for a spectrum of applications, from straightforward apartment setups to intricate mixed-use environments.



Flexible Communication

Facilitate flexible communication between residents, property and building managers. The integration of smartphones with the IXG System allows instant contact even when outside the tenant building.

APP ONLY APARTMENT SYSTEM

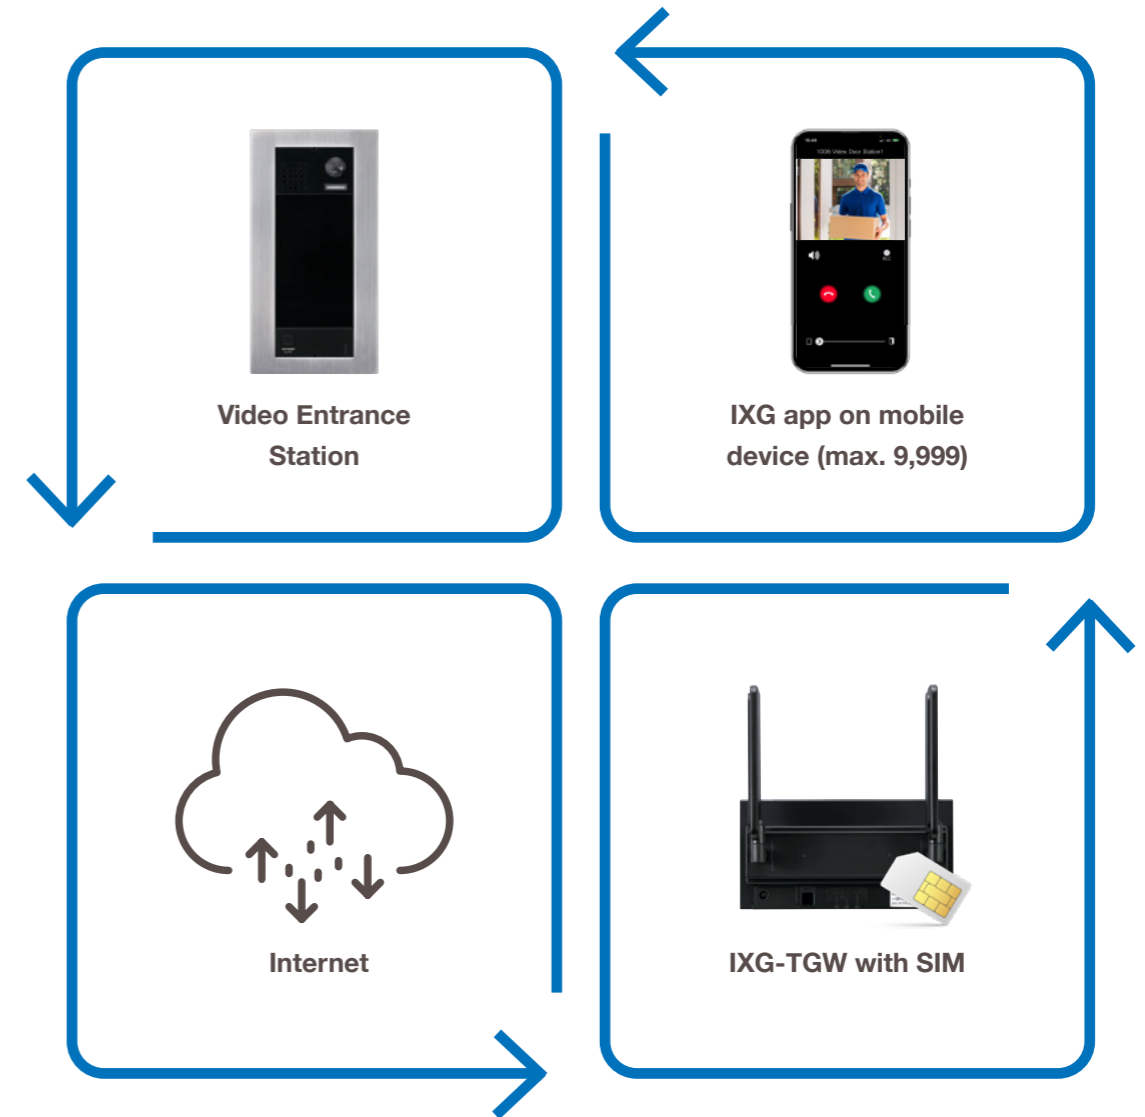

IXG APP

Answer calls anywhere

Calls from the entrance station can be answered using your smartphone from anywhere. You can see and communicate with visitors and decide whether to grant access. You can monitor entrance stations from your smartphone.

Use your own device

Use your mobile device as your intercom via the app. No hardware installation is required in your apartment. You can use up to 8 smart devices.

Unlock the door using a QR code

Generate a QR code via the app and share with visitors or contractors to access a specified entrance station. It can be generated with parameters such as number of uses, duration, time slots, entrance area etc. to prevent unauthorised access.



\\ VIDEO TENANT STATION



IXG-2C7


FEATURES

- High-resolution 7-inch touchscreen LCD
- Slim design blends seamlessly with the interior
- Apartment to apartment calling available
- Monitor images from the entrance or surveillance cameras in common areas directly from your room

IXG-2C7 SPECIFICATIONS

Power source	Power-over-Ethernet (IEEE 802.3af Class 0)
Type of communication	Full-duplex audio (depending on the destination station)
Monitor	7 inch TFT LCD display
Number of units in address book	Max. 9,999 units (IX/IXG stations: Max. 500 stations + IXG app: Max. 9,999)
Number of buildings	Max. 99 buildings
Number of stations per room	8 stations and 8 IXG app
Mounting	Wall-mount
Material	Flame resistant PC + ABS resin
Recording	microSDHC memory card, 4GB to 32GB, FAT32, SD speed class 10

\\ IXG APP

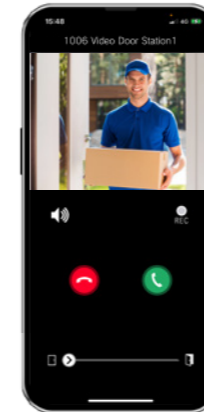

AIPHONE
IXG APP

FEATURES

- Receive calls from entrance stations and door stations
- Monitor entrance stations and door stations
- Check call history
- Check recording list
- Receive messages from property manager
- Create and manage QR codes for QR code entry
- Register up to 10 different IXG properties

IXG APP SPECIFICATIONS

Where to download



Min. spec available Available on www.aiphone.net or on the App Store and Play Store.

Number of units in address book Max. 9,999 units (IX/IXG stations: Max. 500 stations + IXG app: Max. 9,999)

\\ VIDEO ENTRANCE STATION



IXG-DM7



IXG-DM7-HIDA

FEATURES

- Approx. 170° wide angle camera with LED illumination for night vision
- User-friendly 7-inch touchscreen LCD
- 4 selectable calling methods and 12 languages available
- Unlock door via QR code in IXG app or with a PIN code

IXG-DM7 & IXG-DM7-HIDA SPECIFICATIONS

Power source	Power-over-Ethernet (IEEE 802.3af Class 0)
Type of communication	Full-duplex audio (destination station dependent)
Monitor	7 inch TFT LCD display
Camera	1/2.7 inch color CMOS
Minimum illumination	5 lux
Number of units in address book	Max. 9,999 stations (IX/IXG stations: Max. 9,998 stations + IXG app: Max. 9,999)
Number of buildings	Max. 99 buildings
Mounting	Flush wall-mount
Material	Front panel: Stainless steel, vertical alignment finished Main unit Case: Flame resistant PC + ABS resin LCD display: Glass Chassis: Die-cast aluminum
IP and IK Rating	IP65 IK08
Recording	microSDHC memory card, 4GB to 32GB, FAT32, SD speed class 10
Compatible Card Formats (HIDA only)	High Frequency (13.56Mhz) HID iCLASS, SEOS, HID CLASS SR, HID iCLASS SE, HID MIFARE Classic, HID Mifare DES Fire EV1 Low Frequency (125kHz) HID Proximity, Indala Proximity
Cards (HIDA only)	26bit Wiegand format (H10301) 37bit Wiegand format (H10302 & H10304) Corporate 1000 (35 bit & 48 bit)
Mounting	Flush or surface mount boxes available

\\ DOOR STATION



IX-EA



IX-SS-2G

IX-EA SPECIFICATIONS

Power source	Power-over-Ethernet (IEEE 802.3af Class 0)
Type of communication	Hands-free automatic voice switching
Camera	1/3 inch color CMOS
Minimum illumination	5 lux
Mounting	Wall-mount
Material	Fire retardant ABS resin
IP rating	IP54

IXG-SS-2G SPECIFICATIONS

Power source	Power-over-Ethernet (IEEE 802.3af Class 0)
Type of communication	Hands-free automatic voice switching
Mounting	Flush wall-mount
Material	Front panel: Stainless steel Main unit: Self-extinguishing ABS resin
IP rating	IP65
IK rating	IK08

\\ GUARD STATION



IXG-MK

FEATURES

- 7inch touchscreen LCD
- Compatible with both desktop and wall-mount installation
- Reception mode enables property managers to direct calls with the consent of the tenant
- Ideal for use by property managers, receptionists and guards.

IXG-MK SPECIFICATIONS

Power source	Power-over-Ethernet (IEEE 802.3af Class 0)
Type of communication	Full duplex audio (depending on the destination station)/touch-to-talk
Monitor	7 inch TFT LCD display
Number of stations in address book	Max. 9,999 stations (IX/IXG stations: Max. 9,998 stations + IXG app: Max. 9,999)
Mounting	Desktop use (with desktop stand) or wall-mount
Material	Flame resistant PC + ABS resin
Recording	microSDHC memory card, 4GB to 32GB, FAT32, SD speed class 10 microSDXC memory card, 64GB to 128GB, exFAT, SD speed class 10, UHS speed class 1

\\ ADAPTORS



IXGW-TGW
GATEWAY ADAPTOR



IXGW-LC
LIFT CONTROL
RELAY ADAPTOR

IXGW-TGW SPECIFICATIONS

Power source	Power-over-Ethernet (IEEE 802.3af Class 0)
Channel	8
Mounting	Wall-mounted (DIN rail)
Material	Self-extinguishing ABS resin

IXGW-LC SPECIFICATIONS

Power source	Power-over-Ethernet (IEEE 802.3af Class 0)
Mounting	Wall-mounted (DIN rail)
Material	Self-extinguishing ABS resin

COMPATIBILITY

The IXG system allows seamless integration with all devices within the IX System as well as other third-party IP devices such as network cameras and VMSs. The IXG system offers a one-stop solution for various scenarios in different buildings, ranging from residential complexes to office buildings and commercial facilities. It provides comprehensive support for functions such as visitor management, emergency calls, 24/7 recording, and more.




IX-DVM

IX-DV

IX-DVF-2RA



IX-MV7-HB

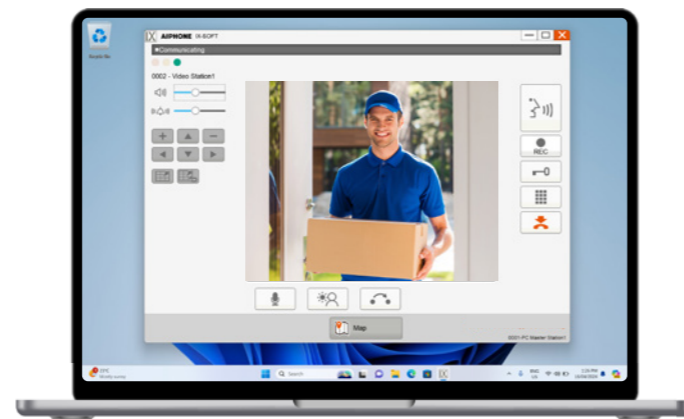

IX-SOFT

SEAMLESS INTEGRATION





AIPHONE

Japan's finest intercoms



Deming Prize



JQA-0291
Corresponding product:
Standard product
Order Product



JQA-EM0453
Headquarters Toyota
Factory Taihoh Site
Development Center

Distributed by:
Aiphone Pty Ltd
Unit 11A, 2 Eden Park Drive
Macquarie Park, NSW 2113 Australia
02 8036 4507
aiphone.com.au

All rights reserved. All statements valid at time of printing. The design and specifications are subject to change without notice for improvement.